





迈拓电子  
MAITUO ELECTRONIC

## ESDRV05H4 TVS Diode Array

### Features

- ◆ 150 Watts peak pulse power ( $tp = 8/20\mu s$ )
- ◆ Transient protection for high speed data lines to IEC 61000-4-2 (ESD)  $\pm 15kV$  (air),  $\pm 8kV$  (contact)  
IEC 61000-4-4 (EFT) 40A (5/50ns)
- ◆ Working voltages : 5V
- ◆ Protects two I/O lines
- ◆ Low operating and clamping voltages
- ◆ Solid-state silicon avalanche technology

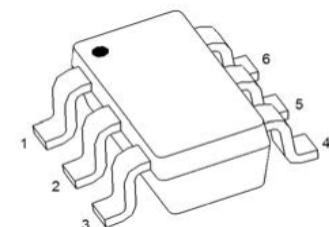

### Applications

SOT23-6L

- ◆ Notebooks, Desktops, Servers and Video Graphics Cards
- ◆ USB Power & Data Line Protection
- ◆ Monitors and Flat Panel Displays
- ◆ I<sup>2</sup>C Bus Protection
- ◆ Portable Instrumentation
- ◆ Set Top Box

MARKING:V05

Maximum Rating @  $T_a=25^\circ C$  unless otherwise specified

Symbol	Parameter	Ratings	Units
P <sub>PK</sub>	Peak Pulse Power ( $tp = 8/20\mu s$ )	150	Watts
T <sub>L</sub>	Lead Soldering Temperature	260(10sec.)	°C
T <sub>J</sub>	Operating Temperature	-55 to +125	°C
T <sub>STG</sub>	Storage Temperature	-55 to +150	°C







迈拓电子  
MAITUO ELECTRONIC

### Electrical Characteristics@ Ta=25°C unless otherwise

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V <sub>RRM</sub>	Reverse Working Voltage	Any I/O to Ground			5	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA, Any I/O to Ground	6			V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 5V, Any I/O to Ground			1	µA
V <sub>c</sub>	Clamping Voltage	I <sub>PP</sub> = 1A, tp =8/20µs, any I/O pin to Ground			15.5	V
		I <sub>PP</sub> = 4A, tp =8/20µs, any I/O pin to Ground			20	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> = 0V, f = 1MHz, between I/O pins		0.3	0.6	pF
		V <sub>R</sub> = 0V, f = 1MHz, any I/O pin to Ground		0.6	1	pF


### Typical Characteristics@ Ta=25°C unless otherwise specified

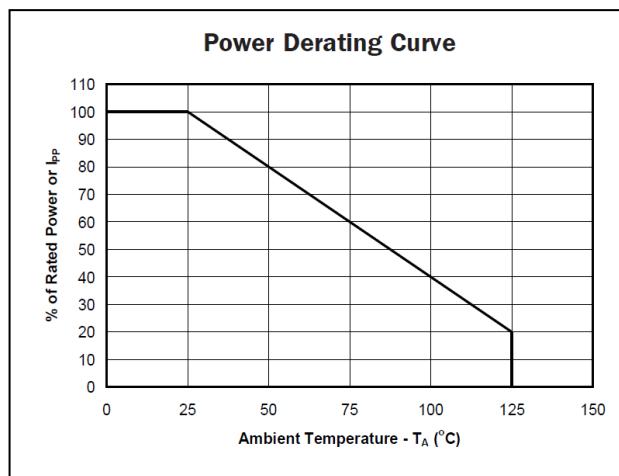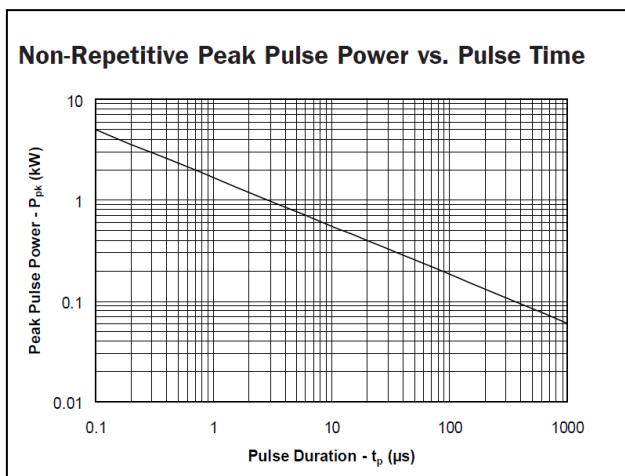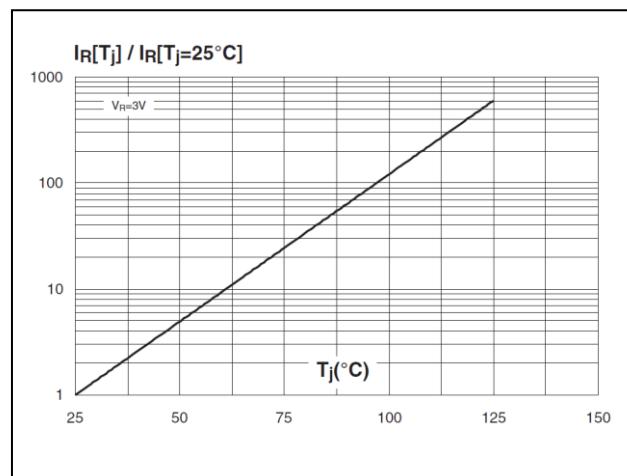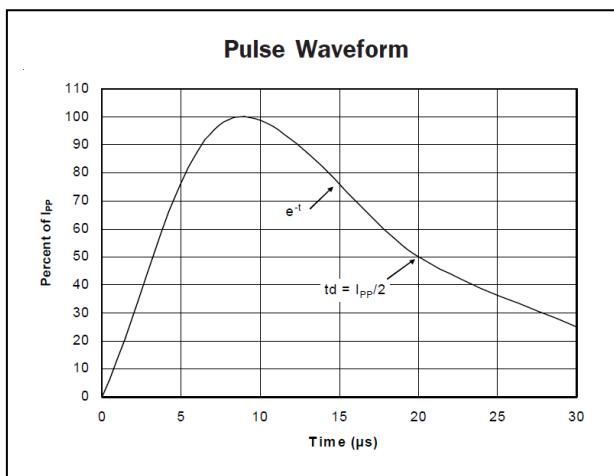




迈拓电子  
MAITUO ELECTRONIC

### SOT-23-6L Package Outline Dimensions

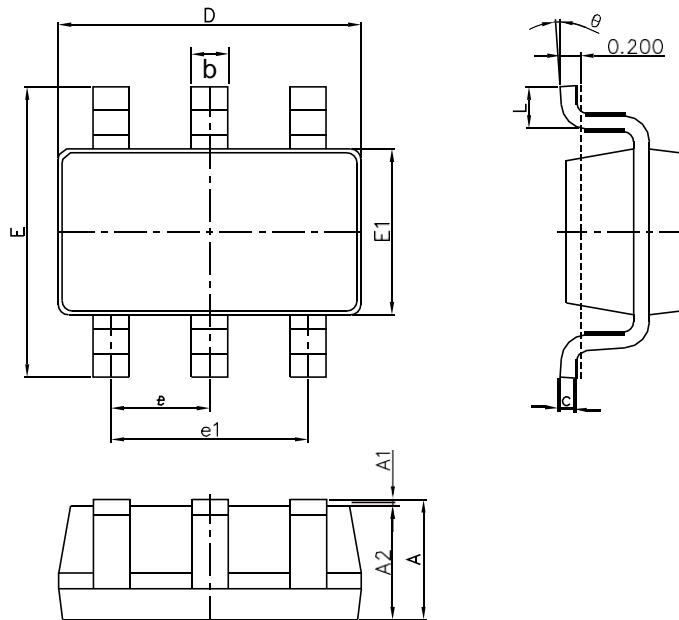

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

### SOT-23-6L Suggested Pad Layout

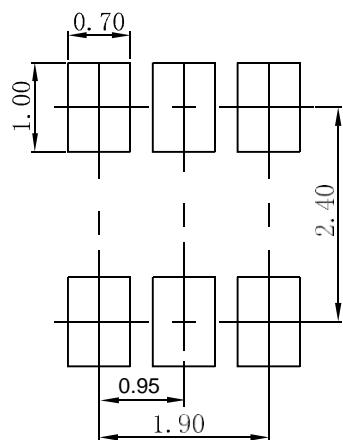

#### Note:

1. Controlling dimension:in millimeters.
- 2.General tolerance: $\pm 0.05\text{mm}$ .
- 3.The pad layout is for reference purposes only.