




迈拓电子
MAITUO ELECTRONIC


UMD9N Dual Digital Transistors (NPN+PNP)



FEATURES

- DTA114Y and DTC114Y transistors are built-in a package

MARKING:D9



SOT-363

Absolute maximum ratings(Ta=25°C)

Parameter	Symbol	Limits		Unit
Supply voltage	V _{CC}	50		V
Input voltage	V _{IN}	-6~40		V
Output current	I _O	70		mA
	I _{C(MAX)}	100		
Power dissipation	P _d	150(TOTAL)		mW
Operation Junction and Storage Temperature Range	T _J , T _{stg}	-55~+150		°C







Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Input voltage	V _{I(off)}	0.3			V	V _{CC} =5V ,I _O =100μA
	V _{I(on)}			1.4		V _O =0.3V ,I _O =1mA
Output voltage	V _{O(on)}			0.3	V	I _O /I _I =5mA/0.25mA
Input current	I _I			0.88	mA	V _I =5V
Output current	I _{O(off)}			0.5	μA	V _{CC} =50V, V _I =0
DC current gain	G _I	68				V _O =5V ,I _O =5mA
Input resistance	R _I	7	10	13	KΩ	
Resistance ratio	R ₂ /R ₁	3.7	4.7	5.7		
Transition frequency	f _T		250		MHz	V _{CE} =10V ,I _E =-5mA,f=100MHz



迈拓电子
MAITUO ELECTRONIC


Typical Characteristics

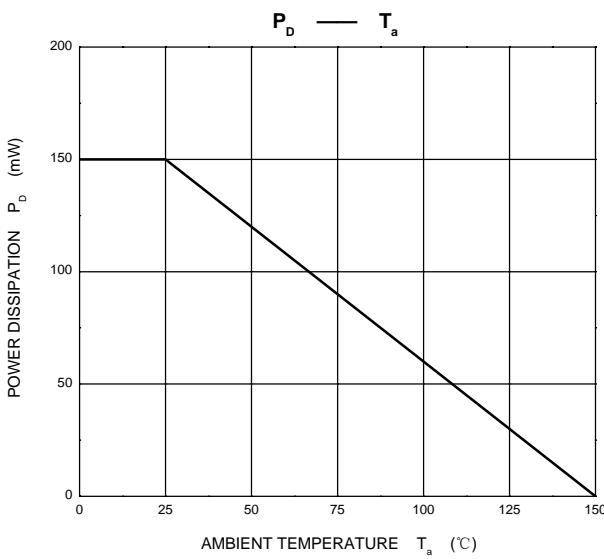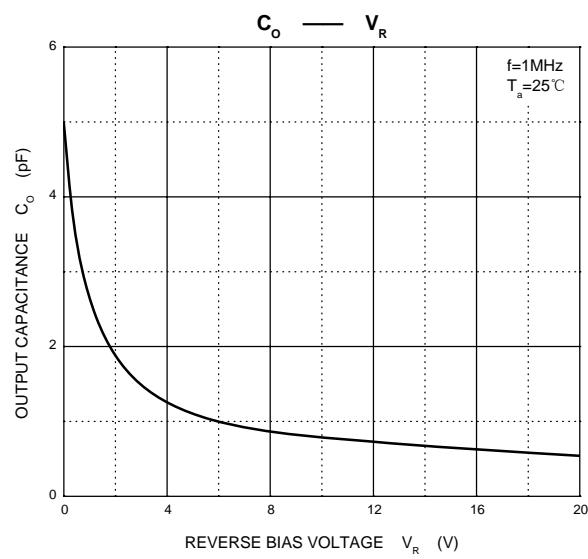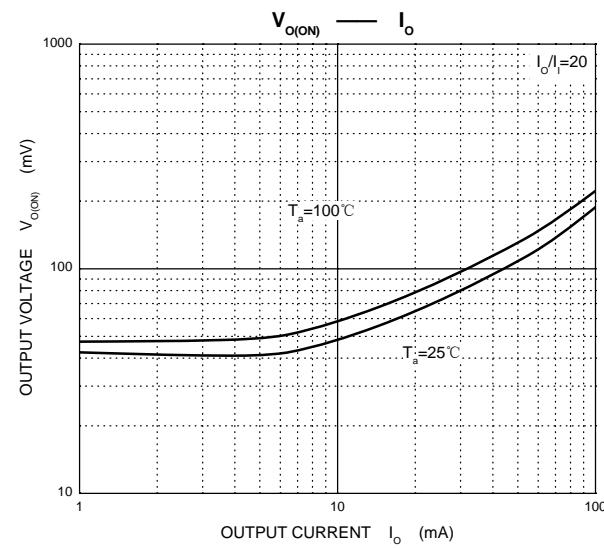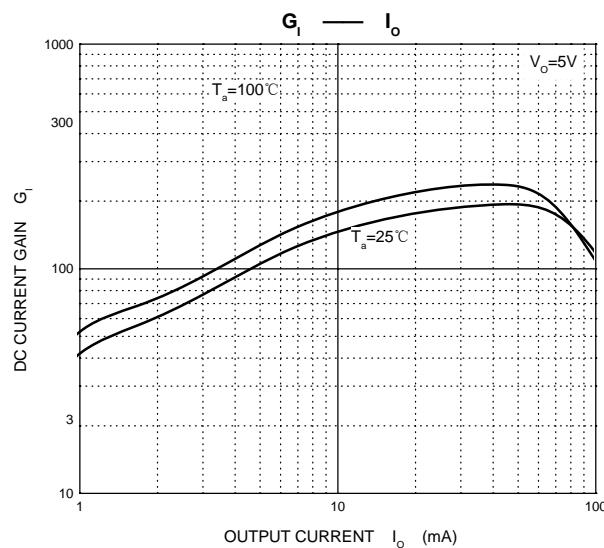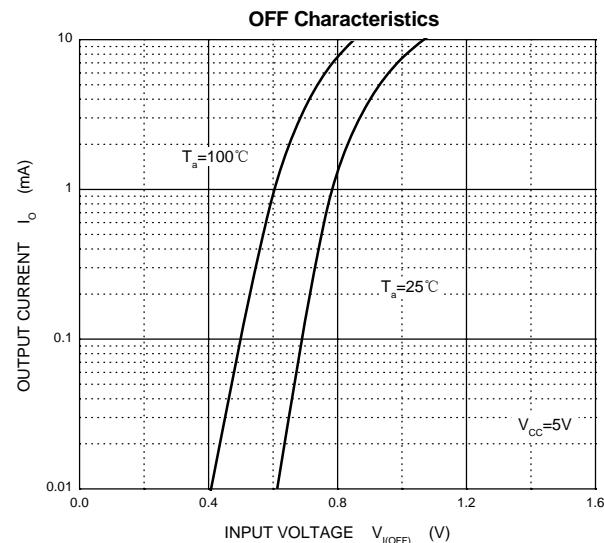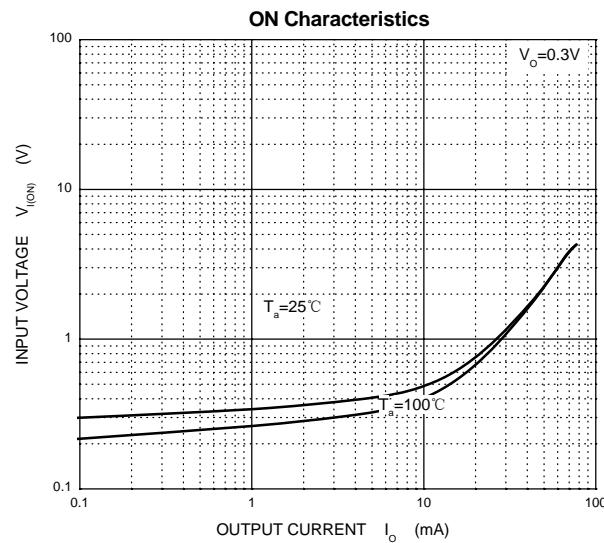



迈拓电子
MAITUO ELECTRONIC

SOT-363 Package outline dimensions

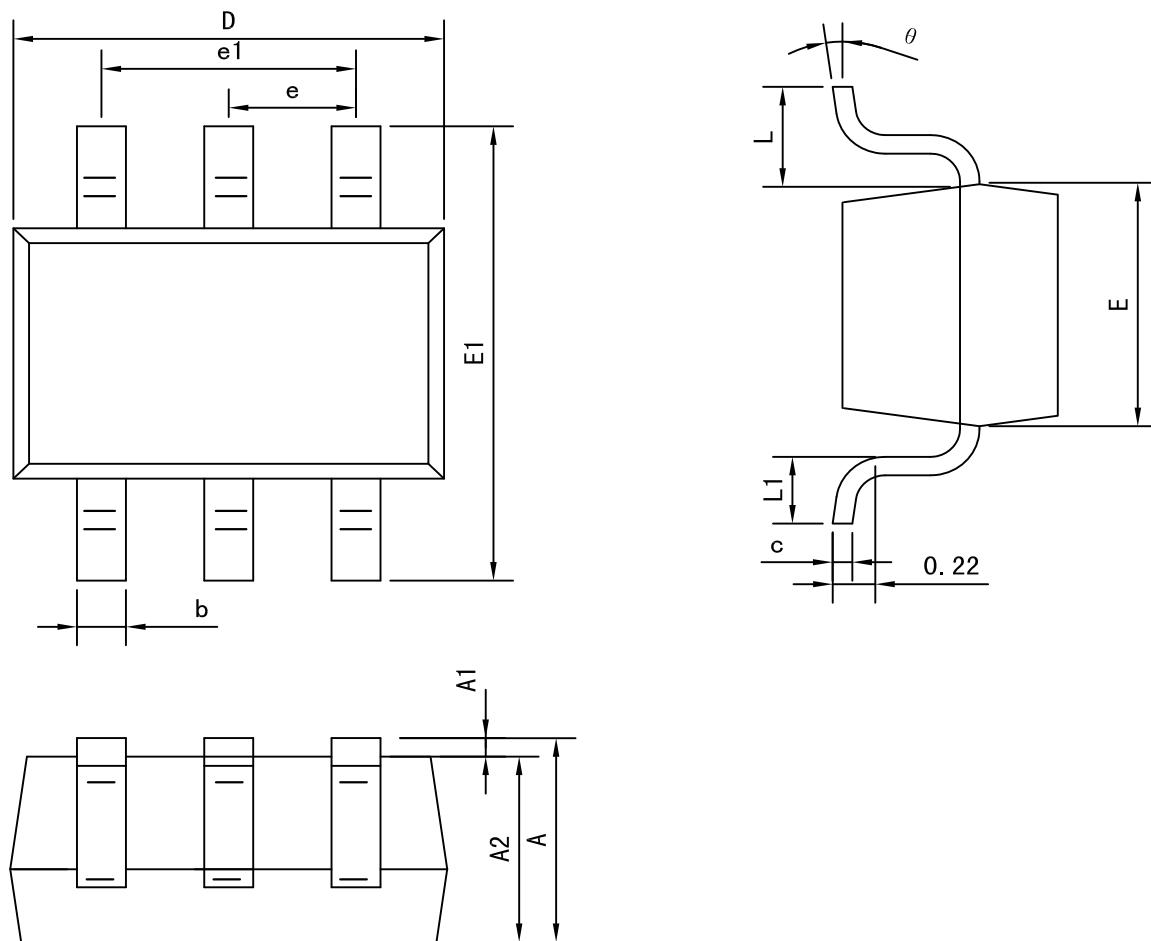


Symbol	Dimension in Millimeters	
	Min	Max
A	0.900	1.100
A1	0.000	0.100
A2	0.900	1.000
b	0.150	0.350
c	0.080	0.150
D	2.000	2.200
E	1.150	1.350
E1	2.150	2.450
e	0.650 TYP	
e1	1.200	1.400
L	0.525 REF	
L1	0.260	0.460
theta	0°	8°



迈拓电子
MAITUO ELECTRONIC

SOT-363 Embossed Carrier Tape

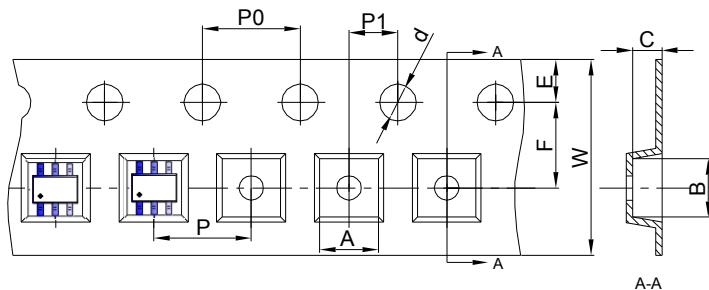

Packaging Description:

SOT-363 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-363	2.25	2.55	1.20	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-363 Tape Leader and Trailer

