




迈拓电子
MAITUO ELECTRONIC

NPN Silicon Epitaxial Planar Digital Transistor

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process



MARKING: 24

SOT523

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Emitter Voltage	V_{CEO}	50	V
Input Voltage	V_I	- 10 to + 40	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	150	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5 \text{ V}$, $I_C = 5 \text{ mA}$	β	30	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	I_{CBO}	-	-	500	nA
Emitter Base Cutoff Current at $V_{EB} = 5 \text{ V}$	I_{EBO}	-	-	0.88	mA
Collector Emitter Saturation Voltage at $I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	$V_{CE(sat)}$	-	-	0.3	V
Input on Voltage at $V_{CE} = 0.3 \text{ V}$, $I_C = 10 \text{ mA}$	$V_{I(on)}$	-	-	3	V
Input off Voltage at $V_{CE} = 5 \text{ V}$, $I_C = 100 \mu\text{A}$	$V_{I(off)}$	0.5	-	-	V
Transition frequency at $V_{CE} = 10 \text{ V}$, $-I_E = 5 \text{ mA}$, $f = 100 \text{ MHz}$	f_T	-	250	-	MHz
Input Resistance	R_I	7	10	13	$\text{k}\Omega$
Resistance Ratio	R_2 / R_1	0.8	1	1.2	-



迈拓电子
MAITUO ELECTRONIC

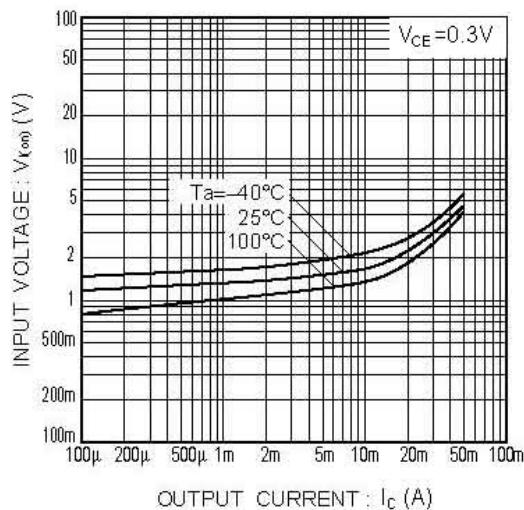


Fig.1 Input voltage vs. output current
(ON characteristics)

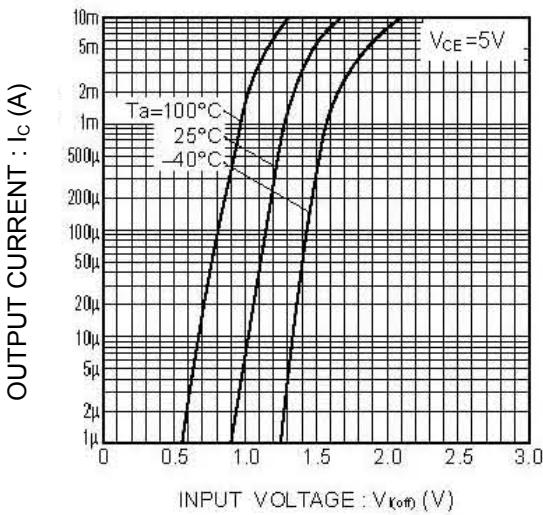


Fig.2 Output current vs. input voltage
(OFF characteristics)

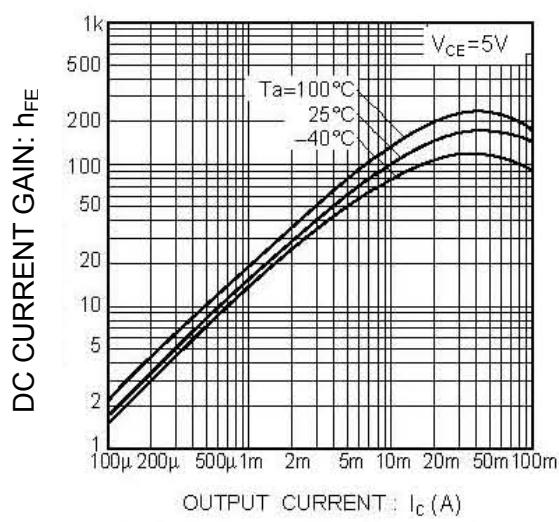


Fig.3 DC current gain vs. output current




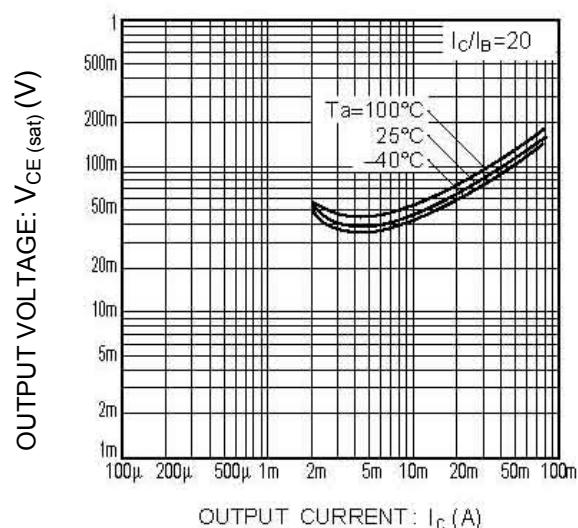


Fig.4 Output voltage vs. output current

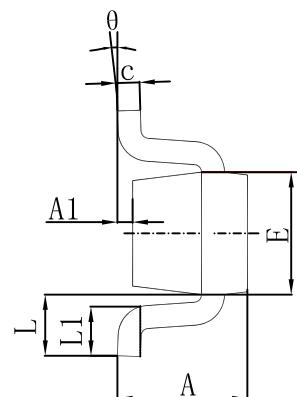


迈拓电子
MAITUO ELECTRONIC

SOT-523 Package Outline Dimensions

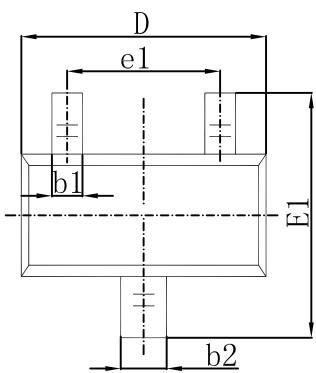

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.