




迈拓电子  
MAITUO ELECTRONIC

## DTC143ZE Silicon Epitaxial Planar Digital Transistor

### Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

MARKING: E23

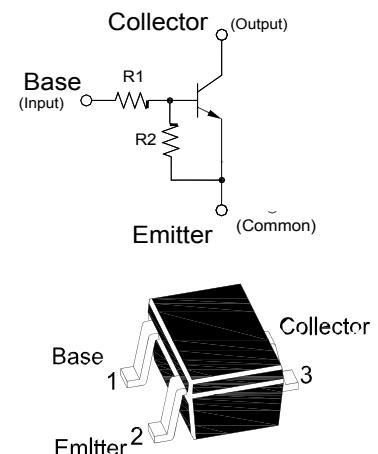

SOT-523

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Emitter Voltage	$V_{CEO}$	50	V
Input Voltage	$V_I$	- 5 to + 30	V
Collector Current	$I_C$	100	mA
Power Dissipation	$P_{tot}$	150	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5 \text{ V}$ , $I_C = 10 \text{ mA}$	$h_{FE}$	80	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	$I_{CBO}$	-	-	0.5	$\mu\text{A}$
Emitter Base Cutoff Current at $V_{EB} = 5 \text{ V}$	$I_{EBO}$	-	-	1.8	mA
Collector Emitter Saturation Voltage at $I_C = 5 \text{ mA}$ , $I_B = 0.25 \text{ mA}$	$V_{CE(sat)}$	-	-	0.3	V
Input on Voltage at $V_{CE} = 0.3 \text{ V}$ , $I_C = 5 \text{ mA}$	$V_{I(on)}$	-	-	1.3	V
Input off Voltage at $V_{CE} = 5 \text{ V}$ , $I_C = 100 \mu\text{A}$	$V_{I(off)}$	0.5	-	-	V
Transition frequency at $V_{CE} = 10 \text{ V}$ , $-I_E = 5 \text{ mA}$ , $f = 100 \text{ MHz}$	$f_T$	-	250	-	MHz
Input Resistance	$R_1$	3.29	4.7	6.11	$\text{K}\Omega$
Resistance Ratio	$R_2 / R_1$	8	10	12	-



迈拓电子  
MAITUO ELECTRONIC

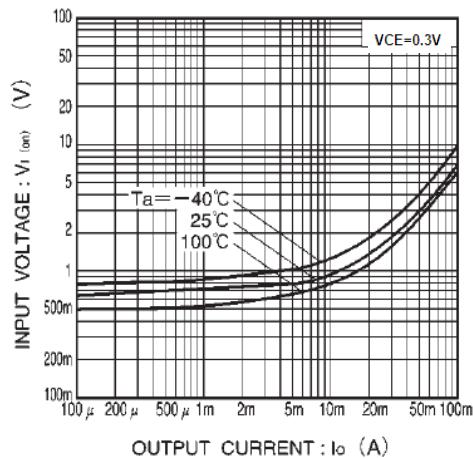


Fig.1 Input voltage vs. output current  
(ON characteristics)

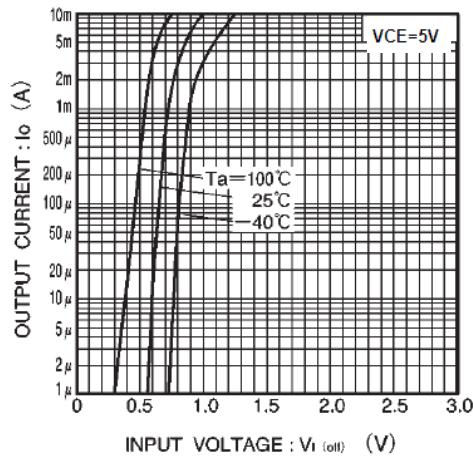


Fig.2 Output current vs. input voltage  
(OFF characteristics)

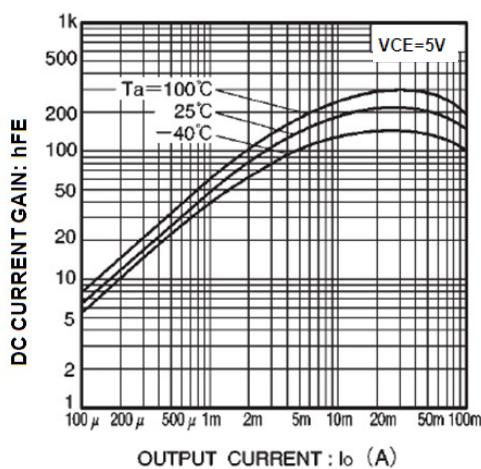


Fig.3 DC current gain vs. output current




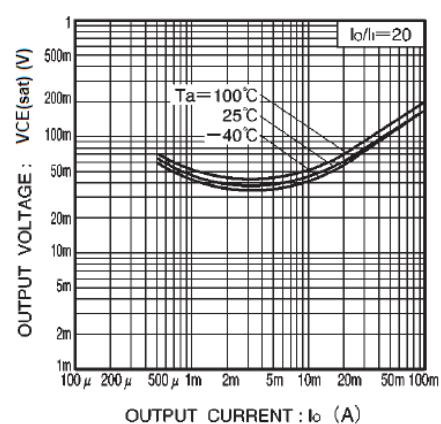


Fig.4 Output voltage vs. output current

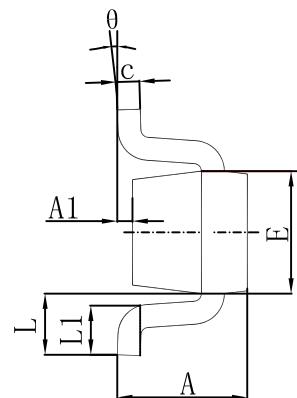


迈拓电子  
MAITUO ELECTRONIC

### SOT-523 Package Outline Dimensions

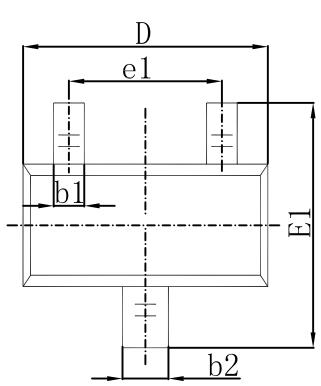

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

### SOT-523 Suggested Pad Layout



#### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.